

This extractor hood with a maximum air throughput of 1928 m³/h is fitted with 3 filters and is intended for wall mounting. The LED lighting ensures a well-lit working area around your cooker, griddle, and so on.

 Operating mode: Assembly type: Max. air throughput: Flame protection filter: Number of filters: Material filter: Protection class: Lighting: 	Exhaust air Wall 1928 m ³ /h Type A 3 Stainless steel IP54 LED Non-dazzle instal With grease prote
 Lamps (number + watt): 	1 x 8 W
Available on request:	Other sizes Hood with depth Ceiling hood
 Including: 	-
 Power load: 	0,008 kW 230 V
 Material: 	Stainless steel
 Important information: 	-
 Properties: 	Filter carrier

- Size:
- Weight:


all
928 m³/h
pe A
ainless steel
54
D
on-dazzle installation
ith grease protection cover
x 8 W
ther sizes
1 11 1 1 1 6 1 1 1 1

of 1,100 mm

V | 50-60 Hz

Welded-on grease collection channel with discharge tap W 1,700 x D 900 x H 450 mm 49 kg

Bartscher

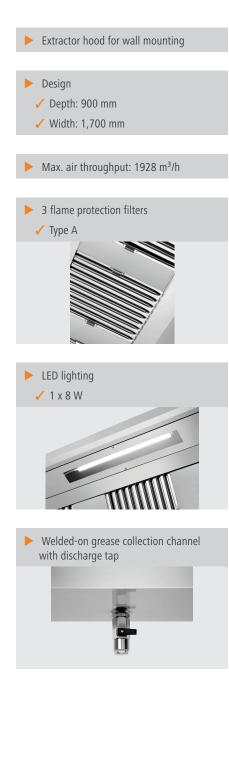





Extractor hood 900-W1700

Add on Products

Intensive power cleaner F1L, set of 2		
 Order quantity unit: Content: Ph level: HACCP compliant: Chlorine-free: Phosphate-free: Including: Important information: 	1 box (2 bottles) 2 x 1 litre 14 Yes Yes Yes 1 spray head 1 spray head 1 spray lance Attention: Not suitable for surfaces sensitive to alkali such aluminium Exclusively available in Germany and Austria	
	Code-No. 173080 GTIN 4015613731933	