


Dishwasher Deltamat TF 50 LR



- ▶ With lye pump and cleaning agent dosing pump

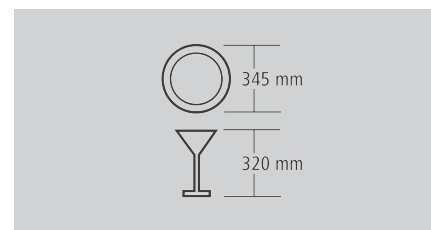

- ▶ Output/h: 30 baskets
- ▶ Run-time: 120 seconds

- ▶ Double-walled door
- ▶ Can be fitted below the counter
- ▶ We recommend a warm water connection up to 55 °C

Description

Features

• Plate height max.:	345 mm
• Door double-walled:	Yes
• Glasses height max.:	320 mm
• Power load:	3,45 kW 230 V 50 Hz
• Water outlet:	Ø 24 mm
• Dry-run protection:	Yes
• ON/OFF switch:	Yes
• Output / hour max.:	30 baskets
• Lye pump:	Yes
• Water softener:	No
• Clear rinsing dosing pump:	Yes
• Door contact switch:	Yes
• Cleaning agent dosing pump:	Yes
• Basket dimensions:	500 x 500 mm
• Tank heater:	2,7 kW
• Boiler heater:	2,8 kW
• Run-time:	120 seconds

▶ Continue on the next page

Dishwasher Deltamat TF 50 LR

- Tank volume: 29 litre(s)
- Water pressure: 2 - 4 bar
- Water supply: G 3/4" MI
- Double-walled: No
- Material: CNS 18/10
- Important information: Warm water connection recommended up to 55°C
- Cold rinsing: No
- Including: 1 glasses basket
1 plate basket
1 cutlery holder
- Can be fitted below the counter: Yes
- Control lamp: Heat up
ON/OFF
- Self-cleaning: No
- Safety thermostat: Yes
- Equipment connection: 1 NAC, not ready to plug in
- Number of wash programs: 1
- Display: -
- Water intake temperature: 55 °C
- Water consumption at 2 bar: 2.3 litres / wash cycle
- Size: W 590 x D 600 x H 850 mm
- Weight: 59 kg

